

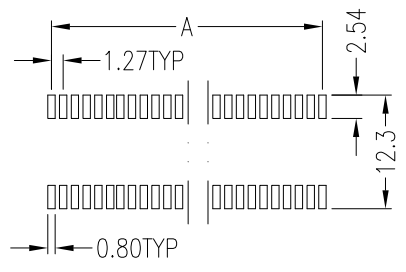

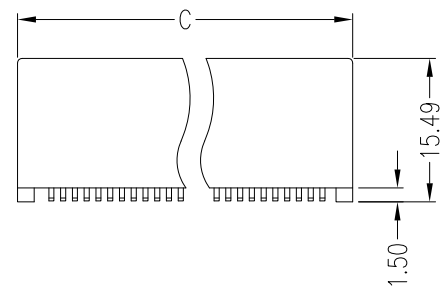


REV.	ECN.NO.	DATE
A	RELEASED	05/26-'00
E	Modify SPEC	10/20-'21
F	Modify the description	11/21-'22

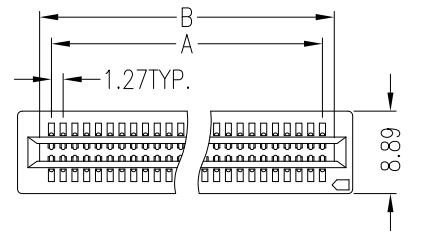

P.C.B. Layout (±0.05)

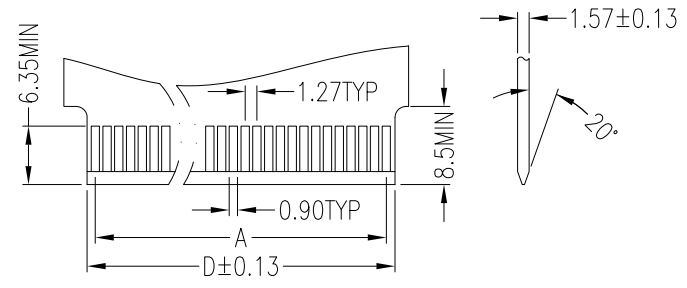

Daughter Card Requirements (±0.05)

NOTES:

*Material

Body: PPS, UL 94V-0.
 Contacts: Phosphor Bronze.
 Plating: Au Plating On Contact Area.
 Sn(100u" Min.) Plating On Solder Tail.
 Ni(50u" Min.) Underplating Overall.

*Mechanical

Insertion Force: 196 Grams Max.
 Withdrawal Force: 28 Grams Min.
 Contact Retention: 1 lb. Min.
 Durability: 100 Cycles.

*Electrical Specification

Current Rating: 1 Ampere.
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Dielectric Withstanding Voltage: 500 VAC.

*Environmental

Operating Temperature: -55°C To +105°C.

*How To Order

W2C-XXXA151P1PU

- U: Lead Free
- P: Phosphor Bronze
- 1: Black
- P: PPS
- 1: Non-Post
- 5: SMT Type
- 1: One Card Slot
- Gold A: Flash
- NO. of Contacts

	DIM"A"	DIM"B"	DIM"C"	DIM"D"
10 Pin	5.08	7.62	10.80	7.37
20 Pin	11.43	13.97	17.15	13.72
30 Pin	17.78	20.32	23.50	20.07
120 Pin	74.93	77.47	80.65	77.22

REV	Modify the description			Drawing By	Date	WIN WIN PRECISION IND. CO., LTD.	
	Units	mm	Scale	1:1	Rainy	11/21-'22	TEL:886-2-22994155 FAX:886-2-22994157
	Tolerance Unless Otherwise Specified				Reviewed By	Date	Title MCA 1.27mm SMT Type (Non-Post)
	.X	~	±0.35	Rosh	12/02-'22		
	.XX	~	±0.25	Approval By	Date		
	.XXX	~	±0.15	Nancy	12/06-'22		
	Angle	~	± 3'			Third Angle Projection	Drawing No. MCA-SMT-AN-N113 REV E