
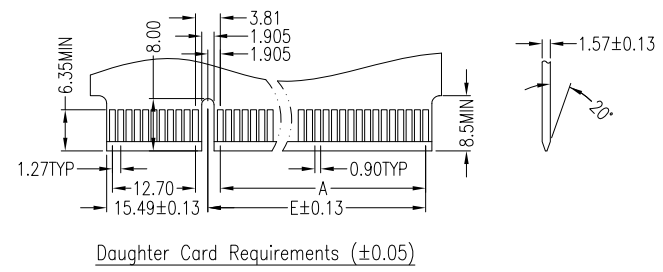
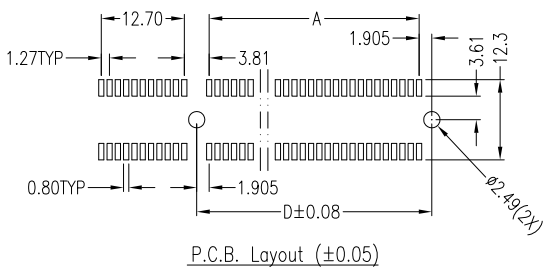

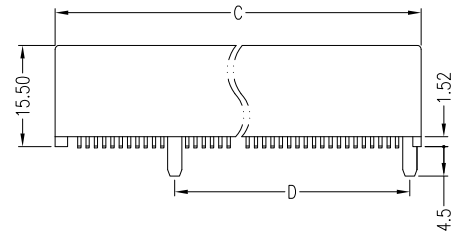


REV.	ECN.NO.	DATE
A	RELEASED	06/14/99
D	Revise DIM	05/30-'14
E	Modify the description	11/21-'22

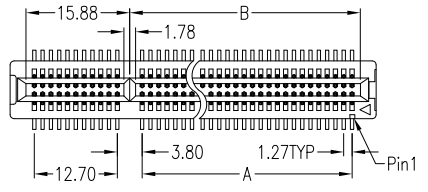

NOTES:

\*Material

Body: PPS, UL 94V-0.  
 Contacts: Phosphor Bronze.  
 Plating: Au Plating On Contact Area.  
 Sn(100u" Min.) Plating On Solder Tail.  
 Ni(50u" Min.) Underplating Overall.

\*Mechanical

Insertion Force: 196 Grams Max.  
 Withdrawal Force: 28 Grams Min.  
 Contact Retention: 1 lb. Min.  
 Durability: 100 Cycles.

\*Electrical Specification


Current Rating: 1 Ampere.  
 Contact Resistance: 30 Milliohms Max.  
 Insulation Resistance: 1000 Megohms Min.  
 Dielectric Withstanding Voltage: 500 VAC.

\*Environmental

Operating Temperature: -55°C To +105°C.

\*How To Order

W2M-XXXA252P3PU

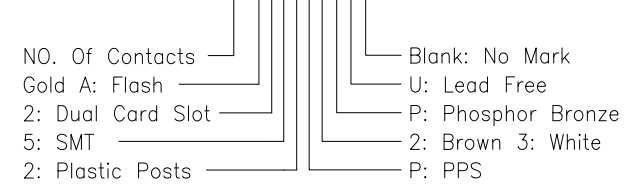

	DIM"A"	DIM"B"	DIM"C"	DIM"D"	DIM"E"
60 Pin	22.86	26.04	46.74	26.67	25.65
120 Pin	60.96	64.14	84.84	64.77	63.75

REV	Modify the description				
Units	mm	Scale	1:1	Drawing By	Date
				Rainy	11/21-'22
Tolerance Unless Otherwise Specified				Reviewed By	Date
.X ~ ±0.35				Rosh	12/02-'22
.XX ~ ±0.25				Approval By	Date
.XXX ~ ±0.15				Nancy	12/06-'22
Angle ~ ± 3'					

WIN WIN PRECISION IND. CO., LTD. TEL:886-2-22994155 FAX:886-2-22994157		Date 11/21-'22 Sheet 1 of 1 Title Card Edge Slot SMT (Plastic Posts)	
Drawing No. MCA-120SPSPS-AN-N106		REV	E