

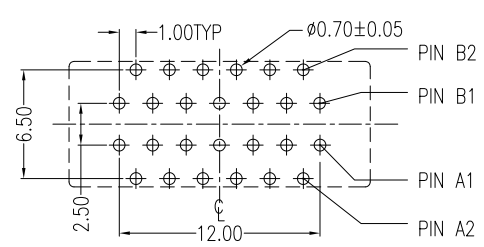
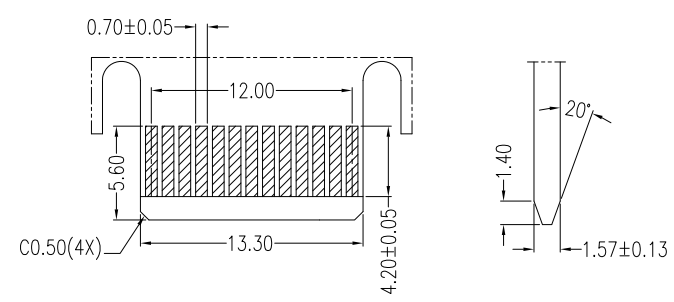
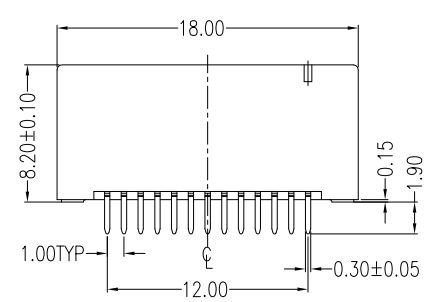
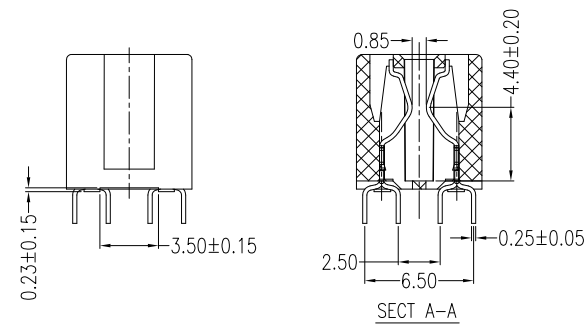


REV.	DESCRIPTION	DATE
A	RELEASED	09/26-'16
B	Modify Notes	05/25-'22

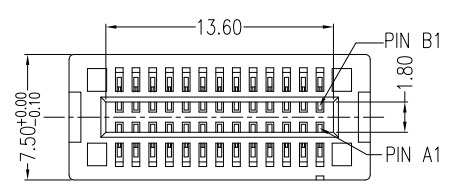

NOTES:

*Material

Body: Nylon66, UL 94V-0.
Contacts: Brass.
Plating: Au Plating On Contact Area.
Sn(100u" Min.) Plating On Solder Tail.
Ni(40u" Min.) Underplating Overall.

*Mechanical

Insertion Force: 2N max per contact pair.
Withdrawal Force: 0.15N min per contact pair.
Contact Retention Force: 4.9N min per contact.

*Electrical Specification

Contact Resistance: 30mΩ Max.
Current Rating: 1.1 Ampere.
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 500V AC.

*Environmental

Operating Temperature: -55°c to +105°c.

*How To Order

W3GS-026AN1B91H

Series NO. _____
NO.of Contacts: 26P _____
Au: A: >0.8u" D: 15u" F: 30u" _____
N: Nylon66 _____

Blank: No Mark
H: Halogen Free
1: None Posts
9: DIP(L=1.90mm)Foggy
B: Brass
1: Black

REV.	Modify Notes (Current Resistance : 1.1 Ampere → Current Rating : 1.1 Ampere)												
Units	mm	Scale	1:1	Drawing By ZT		Date 05/25-'22		 WIN WIN PRECISION IND. CO., LTD. TEL: 886-2-22994155 FAX: 886-2-22994157					
Tolerance Unless Otherwise Specified				Reviewed By Charles		Date 05/27-'22		Date	05/25-'22	Title PCI Express 26Pins (1.90)Foggy			
				Approval By Nancy		Date 06/13-'22		Sheet	1 of 1				
								Third Angle Projection					
				.X ~ ±0.35									
.XX ~ ±0.25													
.XXX ~ ±0.15													
Angle ~ ± 3°										Drawing No.	W3GS-026PS-AN-N193	REV	B