

REV.	ECN.NO.	DATE
A	RELEASED	02/25/08
B	Modify Dimension	03/18/08

Notes:

***Material**

Body : Nylon46+30%G.F or Nylon66+30%G.F,
UL 94V-0 Rated.

Color: Black

Contacts : Brass

Plating: Gold plating over Nickel on contact area; Tin plating on Solder Tail.

***Mechanical:**

Insertion Force: 1.15N max per contact pair;
Withdrawal Force: 0.15N min per contact pair;
Contact Retention Force: 3.43N min per contact;

***Electrical Specification**

Contact Resistance : 30 Milliohms Max.
Current Resistance : 1 Ampere
Insulation Resistance : 1000 Megohms Min, At 500V AC.









***Environmental**

Operating Temperature : -55°C to +105°C

***How to order:**

WPES-026 A N4 1 B 1 1 U W S

- S: Subtract
- W: "WINNING" Mark
- U: Lead Free
- 1: None Posts
- 1: Solder 2.1mm
- 2: Solder 2.5mm
- B: Brass
- 1: Black
- N4: Nylon46
- N: Nylon66
- Selective Gold A: Flash
- Number of contacts

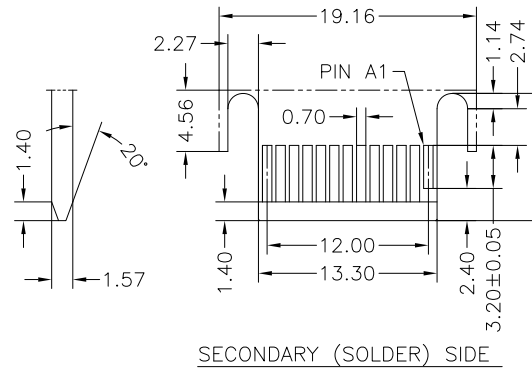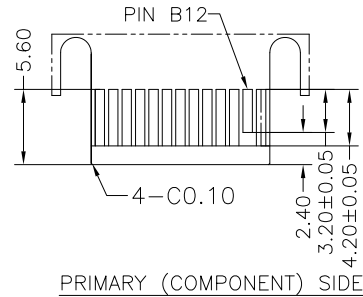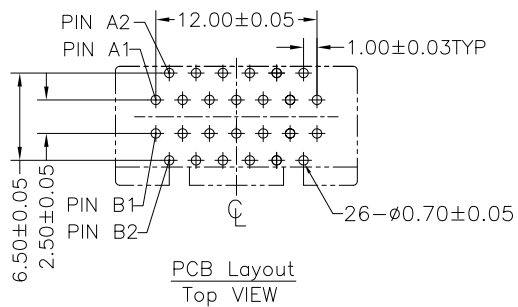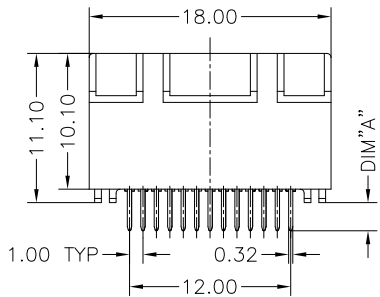

Type	Dim 'A'
Solder 2.1mm	2.10mm
Solder 2.5mm	2.50mm

REV	Modify Dimension: 4.40±0.20			Drawing By	Data	WIN WIN PRECISION IND. CO., LTD. TAIPEI, TAIWAN, R.O.C.
Units	mm	Scale	1:1	LULU	03/18/08	
Tolerance Unless Otherwise Specified				Reviewed By	Data	Date 03/18/08
.X ~ ±0.38				Rosh	03/18/08	Sheet 1 of 1
.XX ~ ±0.25				Approval By	Data	Title PCI EXPRESS CONNECTOR Strip Form Pin 26P None Posts
.XXX ~ ±0.20				Richard	03/18/08	
Angle ~ ± 3°						Third Angle Projection
						Drawing No. WPES-26PS-AN-W107
						REV B