



REV.	ECN.NO.	DATE
A	RELEASED	05/30/05
B	Add Color	03/02/07

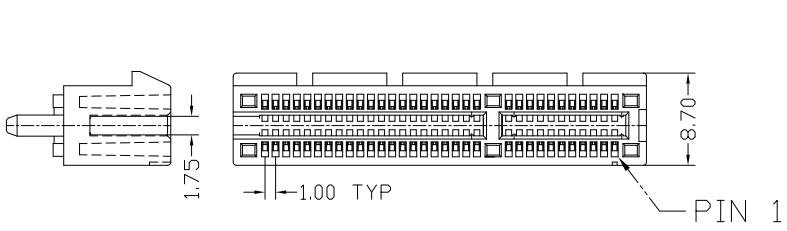

NOTES

***Material**

Body : NYLON66+30%G.F or NYLON46+30%G.F,
 UL 94V-0 Rated.Color: White or Black
 CAV.No: A~H
 Contacts : Brass or Phosphor Bronze
 Plating: Gold plating over Nickel on contact
 Area; Tin plating on Solder Tail.




***Mechanical:**

Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 4.9N min per contact;


***Electrical Specification**

Contact Resistance : 30 Milliohms Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000 Megohms Min, At 500V AC.
 Operating Temperature : -55°C to +105°C


***How to order:**

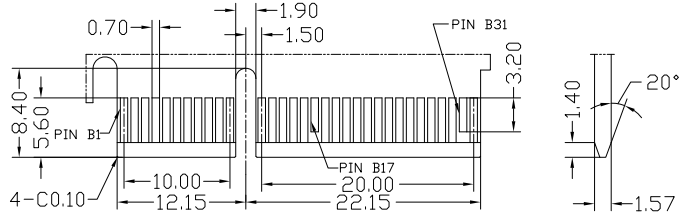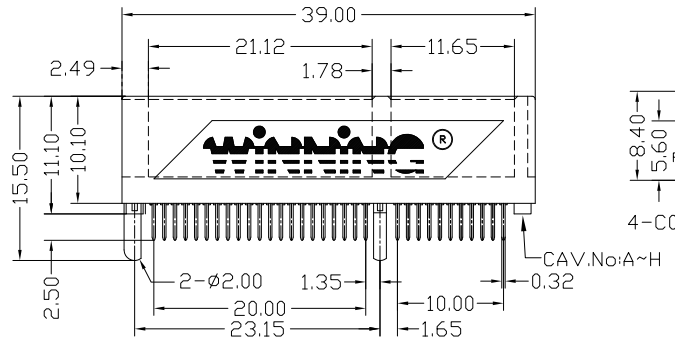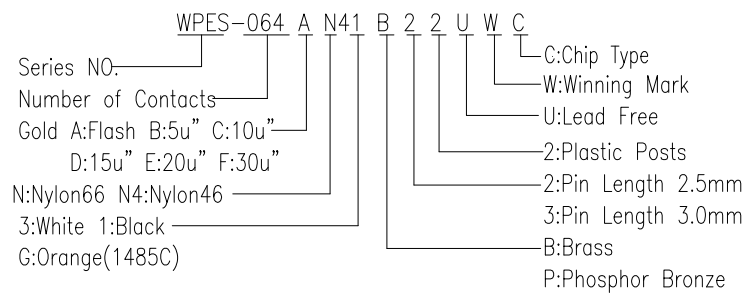

Primary (Component) Side

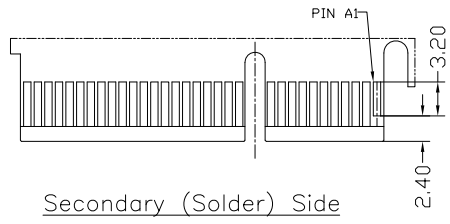

Secondary (Solder) Side

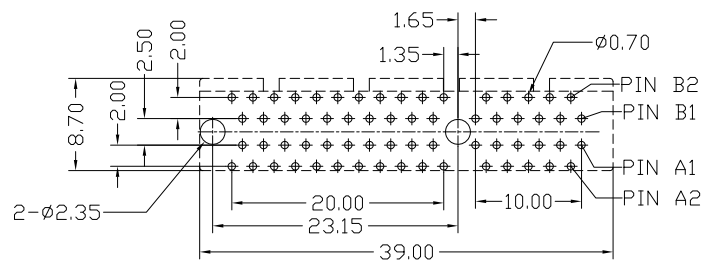

P.C.B Layout
TOP VIEW

REV	Add Color	Orange(1485C)	Drawing By		Date	WIN WIN PRECISION IND. CO., LTD. TAIPEI, TAIWAN, R.O.C.	Title	PCI EXPRESS 64Pin Strip Form Pin Plastic Posts (Chip Type)
Units	mm	Scale	Andy	03/02/07				
Tolerance Unless Otherwise Specified			Reviewed By		Date	Date	Sheet	1 of 1
.X ~ ±0.38			Roger		03/02/07			
.XX ~ ±0.25			Approval By		Date	Third Angle Projection	Drawing No.	WPES-064PS-AN-W055
.XXX ~ ±0.20			Richard		03/02/07			
Angle ~ ± 3°							REV	B